

Expert Advice. Great Value. Contact Us Today!

Call: [203-647-9147](tel:203-647-9147) Email: sales@haywardts.com

Website: www.haywardturnstiles.com

EZ Lane SL2000 Swing Barrier Enhanced Barrier Security

- **Swinging Acrylic Barrier** • **Slim Size and Compact Footprint**
- **Tailgate Detection** • **Bi-Directional** • **Simple Programming**



EZ Lane SL2000

(28" Standard opening up to 36" ADA opening)

The EZ Lane SL2000 sits comfortably at the crossroads of elegant refinement and technological superiority. This swinging barrier optical turnstile combines the security of a physical barrier turnstile with the sophistication of optical beam detection to prevent tailgating and unauthorized entry with ease. Keeping true to its sleek design, the SL2000 also offers space for internal installation of proximity readers with the ability to mount larger readers externally if needed.

This UL listed and CE marked product integrates with nearly all types of credential and biometric readers with ease while facilitating browser-based remote configuration from any networked PC, tablet, or smartphone as a standard feature. Simply remote into the system to tailor your SL2000 to best fit your unique project requirements. Our optional LaneAdmin browser-based software is also available for remotely controlling lanes and scheduling lane changes in real time.

The SL2000 doesn't just allow easy operation; installation is a breeze, too. Aside from integrating with virtually all access control systems, you will find dedicated inputs for fire and life safety systems along with available outputs for integration with 3rd party systems and other devices. Once installed, onboard Ethernet inputs or your remote lane configuration software can be used to fine-tune your SL2000, making it one of the most intuitive and easy to use optical turnstiles on the market.

Narrow Profile Cabinets

The SL2000's slim size and compact footprint saves floor space and allows use of optical turnstiles in areas where space is a premium.



*Modern design blends with any lobby
(Cabinet Finish and Lid Color Options Available)*



EZ Lane SL2000 High Barrier Option 69"

(35", 46", 69", & custom Heights Available)

Need Installation?

Our Hayward Turnstiles access control specialists can coordinate installation with someone from our nationwide database of certified partner installers. Our partner installers are willing to provide you with an entire turn-key quote where they will handle purchasing, delivery, installation, and integration for you.

Applications:

The EZ Lane SL2000 is an aesthetically pleasing swinging barrier turnstile that offers an enhanced level of security inside a slim and very compact footprint. The abrasion resistant acrylic barriers are available in a variety of heights depending upon your security needs.

STANDARD FEATURES

Quick and smooth motorized swinging barriers offer bi-directional operation and fast passage. The SL2000 is also an IP enabled device that allows for browser-based configuration and control from any networked PC, tablet, or smart phone

Optical Detection:

Integrated optical sensors for high accuracy detection of pedestrians

Throughput/Capacity:

Up to 60 passages per minute for fast user throughput

Card Stacking:

- Lane remains open while authorizing multiple credentials
- Increases throughput during busy periods
- Allows simultaneous transactions

Alerts (Visible LED & Audible):

- Highly intuitive LED illuminated user graphics
- User status display flush mounted in lid

Tailgate Detection:

- Optical sensors detect piggybacking attempts
- Alarms chime when unauthorized entry is detected

Easy Lane Configuration:

- Browser-based lane configuration from any networked device
- Onboard Ethernet port for direct access to lane configuration

Integration:

- Integrates easily with 3rd party systems (cameras, guard signals) with dedicated inputs for fire and life safety systems
- Integrates with nearly all access control readers and software

Power Failure/Emergency Mode:

- Barrier panels easily push open at power failure/emergency
- Barrier auto-resets when power is restored

Cabinet Style:

Stainless steel cabinet with solid surface acrylic top

Quality Control:

Every unit is inspected, tested, and certified before shipment.

OPTIONS

Lane Mounting Platform (for above floor wiring):

- Cabinet is mounted on pedestal base to minimize drilling into floor

Panel Etching:

- Personalization of acrylic panels by etching (e.g. Company Logo)

LaneAdmin Remote Lane Control Software:

- Remotely control your turnstile lanes as traffic flows shift
- Perform diagnostic checks, analyze alarms, display patron counts

External Reader Mount (Adjustable)

- For mounting of readers too large to fit in the internal reader space

Custom Lid Colors and Cabinet Finishes:

- Custom colors and materials available upon request

Custom Illumination:

- Side panel illumination available in a multitude of colors

Custom Lane Widths, Barrier Heights, Barrier Materials:


- Custom barrier heights and materials available upon request
- Custom lane widths and infill panels available upon request

POWER REQUIREMENTS

Input: 110-120 VAC, 60 Hz or 220-240 VAC 50 Hz (Optional)

Output: Primary power is stepped down and rectified for low voltage 24 VDC, 12 VDC, and 5 VDC operation.

Dimensions are shown in inches (mm). All measurements are approximate.

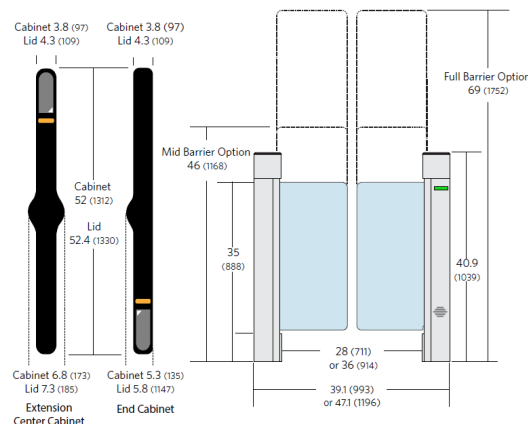

**SL2000 Optical Turnstile Dimensions
(28" Standard Lane, 36" ADA Lane Available)**